



Aroma Perfect Taste




Model: CSACG1VA-R290

Aroma

SEASONER CABINET - SEASONER - TEMP. -2 / +5 °C - 510 LT. GLASS DOOR - AIR CONDENSING UNIT



Ideal climate




Create your layout



Easy to use



Experience at your service




Easy to clean



Maximum visibility



Energy saving



Always perfect results



Ideal for every installation



Ecological refrigerant gas



Coast Distributors Pty Ltd
Ph: (02) 9524 1234 / 1800 688 590
PO Box 288, Unanderra, NSW 2526
sales@coastdistributors.com.au
www.coastdistributors.com.au

CONTROL MECHANISMS

- HACCP alarm management.
- Specific probe for humidity regulation.
- The know-how of the best experts at your disposal
- 5" touch screen color display with control interface
- Responsive humidity management
- Automatic climate change management
- Connectivity with Wi-Fi remote control (optional).

STRUCTURAL CHARACTERISTICS

- Monoblock construction.
- Internal stainless steel.
- External in Skinplate steel.
- Insulation thickness: 80 mm.
- High density CFC and HCFC-free PU insulation (42 kg/m3).
- Ergonomic handle with wooden insert.
- Self-closing doors and magnetic gaskets.
- Silk-screened tempered glass easily-open Dashboard to facilitate periodic maintenance (condenser cleaning)
- Rounded cell corners for easy cleaning
- Locking fixtures.
- Lower infill plinth.
- Wide range of customisation possibilities
- Double glazed door with high insula on level
- Indirect ventilation thanks to the full-length duct system for optimal air circulation and uniform temperature distribution.
- 4000K LED door lighting.

CONDENSING UNITS

- Monoblock ceiling system with an evaporator outside the cold room to allow for the exploitation of the entire refrigerated volume.
- Automatic defrost and defrost water self evaporating.
- Tropicalized group (class "T" 43°C).
- R290 ecological refrigerant gas
- Climate class 4.

STANDARD EQUIPMENT

- Closing plinth
- 1x GN 2/1 grill
- Dip tray with GN 2/1 grill and "C"-slides couple
- 2x "C"-slides couple
- Wi-Fi connection

OPTIONAL TO BE REQUESTED WHEN ORDERING

- SGAC:** Hook complete with "C"-slides couple
- SCGCA-A:** "C" slides couple - with anti-tip
- SVRG:** Dip tray with GN 2/1 grill and "C"-slides couple
- SKRT-02:** Castor kit, 2 with brake

EXTRA ACCESSORIES THAT CAN BE INSTALLED FOLLOWING PURCHASE

- TS-AVPG:** AC 208/230 V - 60 Hz

Coast Distributors Pty Ltd
Ph: (02) 9524 1234 / 1800 688 590
PO Box 288, Unanderra, NSW 2526
sales@coastdistributors.com.au
www.coastdistributors.com.au

EXTRA ACCESSORIES THAT CAN BE INSTALLED FOLLOWING PURCHASE

- IOTK-A:** Connectivity kit
- CGCA-A:** "C" slides couple - with an - p
- VRG:** Dip tray with GN 2/1 grill and "C"-slides couple
- GAC:** Hook complete with "C"-slides couple
- GACM:** Mobile rod for hooks
- G ACF:** Single hook
- IOTC -1:** Coldcloud connec on fee - 1 year
- IOTC -3:** Coldcloud connec on fee - 3 years
- KRT-02:** Castor kit, 2 with brake
- GRI-N21:** Stainless steel grill - GN 2/1

Coast Distributors Pty Ltd
Ph: (02) 9524 1234 / 1800 688 590
PO Box 288, Unanderra, NSW 2526
sales@coastdistributors.com.au
www.coastdistributors.com.au

CAPACITY

Capacity	20 x GN 2/1
----------	-------------

DIMENSIONS

Width	780 mm
Depth	965 mm
Height	2090 mm
Packaging width	820 mm
Packing depth	1005 mm
Packaging height	2240 mm
Net weight	205 kg
Gross weight	215 kg
Volume	1.6 m ³
Packing volume	1.8 m ³
Useful Inner Width	620 mm
Inner depth	725 mm
Doors numbers	1

TECHNICAL DATA


Working temperature	-2 / +5 °C
Motor	On board
Cooling mode	Air
Climate class	4
GWP - Global Warming Potential	1430
Refrigerant - Type	R290
Refrigerant - Quantity	380 g

POWER SUPPLY

Power supply voltage	1N-AC 230 V
Electrical absorp on	6.7 A
Frequency	50 Hz
Total electric power	1.395 kW
Cooling power *	0,320 kW

* TN - Evap. temp. -10°C / Cond. temp. +45°C

Coast Distributors Pty Ltd
 Ph: (02) 9524 1234 / 1800 688 590
 PO Box 288, Unanderra, NSW 2526
sales@coastdistributors.com.au
www.coastdistributors.com.au

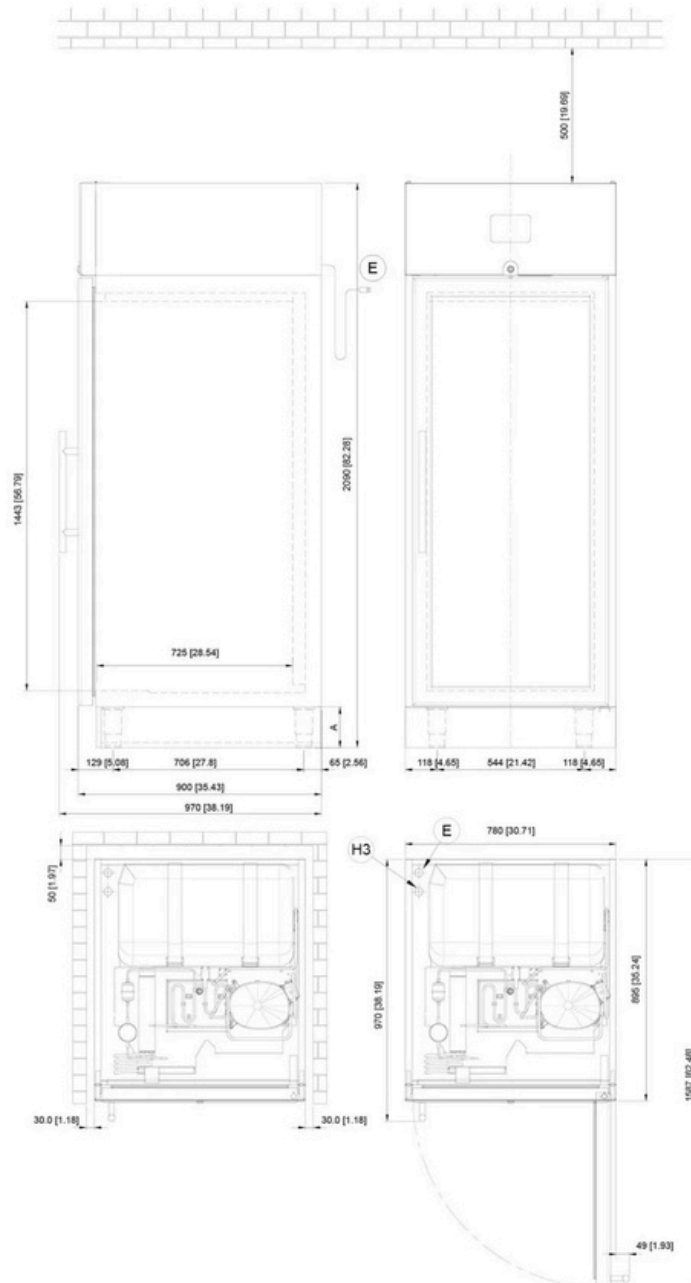

DIMENSIONI mm
DIMENSIONS [in]

A = 140 / 200 PIEDINI - FEET
A = 155 RUOTE ø 100 - CASTORS ø 100

- Ⓔ IT - INGRESSO CAVO ALIMENTAZIONE ELETTRICA
EN - ELECTRICAL POWER SUPPLY CABLE INLET
FR - ENTRÉE DU CÂBLE D'ALIMENTATION ÉLECTRIQUE
DE - ANSCHLUß STROMKABEL
ES - ENTRADA CABLE DE ALIMENTACIÓN ELÉCTRICA
RU - ВХОД ДЛЯ ЭЛЕКТРИЧЕСКОГО КАБЕЛЯ ПИТАНИЯ

- Ⓕ3 CONNESSIONE INGRESSO ACQUA UMIDIFICATORE
HUMIDIFIER WATER INLET CONNECTION