




Perfect freshness

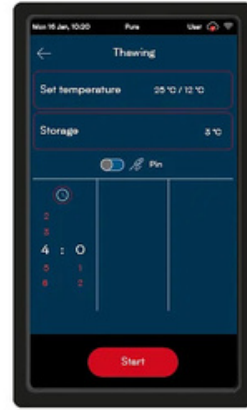

Model: CTPG1A

Pure

THAW CABINET - TEMP. -2 / +10 °C STORAGE - TEMP. -2 / +35 °C THAWING - 510 LT - GN2/1 - AIR CONDENSING UNIT



Full compliance with HACCP standards.



Quality preserved



Always perfect results



Easy to use



Everything is always under control



Ecological refrigerant gas



Coast Distributors Pty Ltd
Ph: (02) 9524 1234 / 1800 688 590
PO Box 288, Unanderra, NSW 2526
sales@coastdistributors.com.au
www.coastdistributors.com.au

CONTROL MECHANISMS

- HACCP alarm management.
- Connectivity with Wi-Fi remote control.
- 5" touch screen color display with control interface
- Thawing process control via core probe
- Homogeneous defrosting of products inside the unit
- Uniform temperature inside the unit thanks to automatic ventilation control

STRUCTURAL CHARACTERISTICS

- Monoblock construction.
- Internal stainless steel.
- External Scotch Brite satin finish stainless steel
- Insulation thickness: 80 mm.
- High density CFC and HCFC-free PU insulation (42 kg/m3).
- Ergonomic stainless steel handle.
- Self-closing doors and magnetic gaskets.
- Silk-screened tempered glass easily-open Dashboard to facilitate periodic maintenance (condenser cleaning)
- Rounded cell corners for easy cleaning
- Locking fixtures.
- Integrated LED lighting on the dashboard.
- Indirect ventilation thanks to the full-length duct system for optimal air circulation and uniform temperature distribution.

CONDENSING UNITS

- Monoblock ceiling system with an evaporator outside the cold room to allow for the exploitation of the entire refrigerated volume.
- Automatic defrost and defrost water self evaporating.
- Tropicalized group (class "T" 43°C).
- R290 ecological refrigerant gas
- Climate class 5.

STANDARD EQUIPMENT

- Connectivity kit
- N. 4 GN 2/1 grids
- N. 4 couple of "C"-shaped slides
- Wi-Fi connection

OPTIONAL TO BE REQUESTED WHEN ORDERING

SZC-ICE: Closing plinth

SCGCA-P: "C" slides couple - with anti-tip

SKRT-02: Castor kit, 2 with brake

EXTRA ACCESSORIES THAT CAN BE INSTALLED FOLLOWING PURCHASE

TS-AVPG: AC 208/230 V - 60 Hz

EXTRA ACCESSORIES THAT CAN BE INSTALLED FOLLOWING PURCHASE

CGCA-P: "C" slides couple - with anti-tip

ZC-ICE: Closing plinth

IOTC-1: Coldcloud connection fee - 1 year

IOTC-3: Coldcloud connection fee - 3 years

KRT-02: Castor kit, 2 with brake

GRI-GN21: Stainless steel grill - GN 2/1

Coast Distributors Pty Ltd
Ph: (02) 9524 1234 / 1800 688 590
PO Box 288, Unanderra, NSW 2526
sales@coastdistributors.com.au
www.coastdistributors.com.au

CAPACITY

Capacity	20 x GN 2/1
----------	-------------

DIMENSIONS

Width	780 mm
Depth	965 mm
Height	2090 mm
Packaging width	820 mm
Packing depth	1005 mm
Packaging height	2240 mm
Net weight	199 kg
Gross weight	209 kg
Volume	1.6 m3
Packing volume	1.8 m3
Useful Inner Width	620 mm
Inner depth	710 mm
Doors numbers	1

TECHNICAL DATA


Working temperature	-2 / +35 °C
Motor	On board
Cooling mode	Air
Climate class	5
GWP - Global Warming Potential	3
Refrigerant - Type	R290
Refrigerant - Quantity	115 g

POWER SUPPLY

Power supply voltage	1N-AC 230 V
Electrical absorption	9,7 A
Frequency	50 Hz
Total electric power	1.998 kW
Cooling power *	0,492 kW

* TN - Evap. temp. -10°C / Cond. temp. +45°C

Coast Distributors Pty Ltd
 Ph: (02) 9524 1234 / 1800 688 590
 PO Box 288, Unanderra, NSW 2526
sales@coastdistributors.com.au
www.coastdistributors.com.au

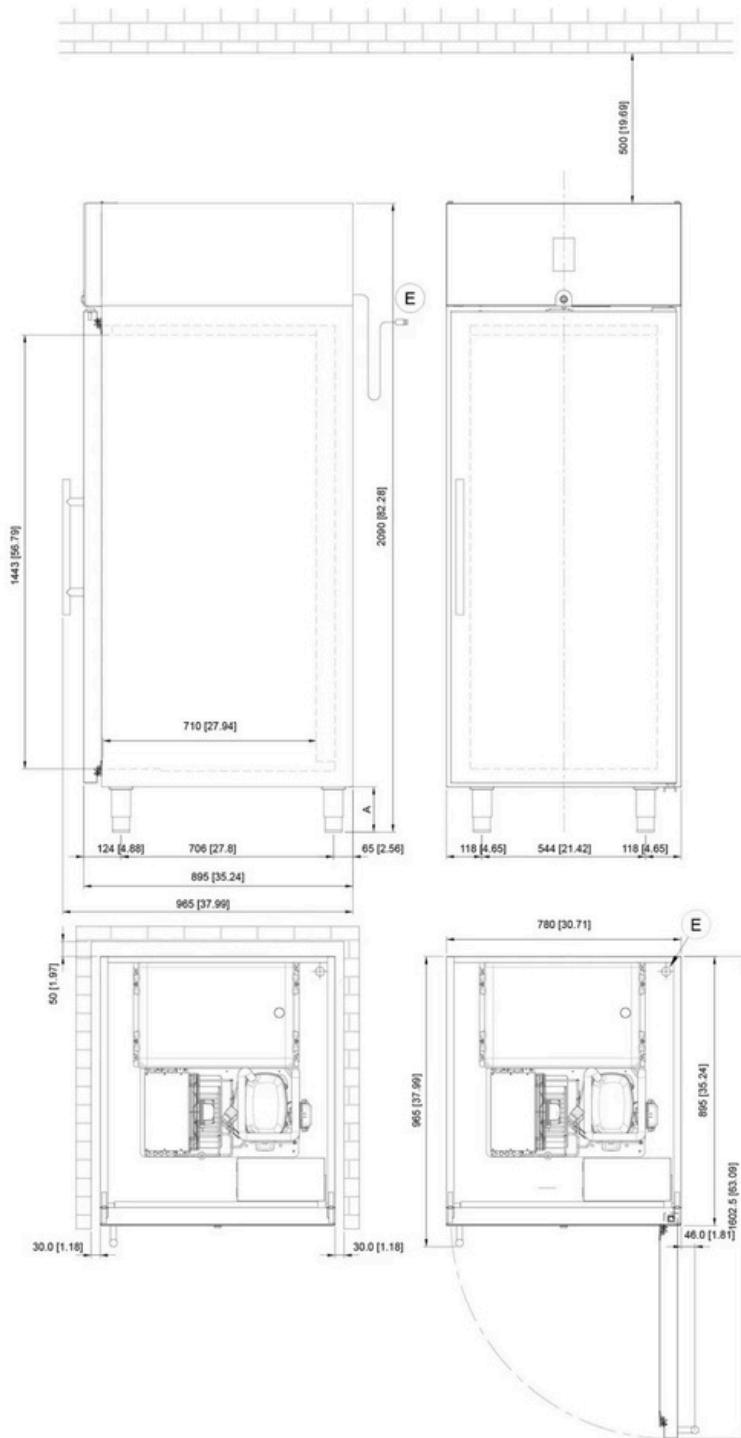

DIMENSIONI mm
DIMENSIONS [in]

A = 140 / 200 PIEDINI - FEET
A = 155 RUOTE \varnothing 100 - CASTORS \varnothing 100

Ⓔ IT - INGRESSO CAVO ALIMENTAZIONE ELETTRICA
EN - ELECTRICAL POWER SUPPLY CABLE INLET
FR - ENTRÉE DU CÂBLE D'ALIMENTATION ÉLECTRIQUE
DE - ANSCHLUß STROMKABEL
ES - ENTRADA CABLE DE ALIMENTACIÓN ELÉCTRICA
RU - ВХОД ДЛЯ ЭЛЕКТРИЧЕСКОГО КАБЕЛЯ ПИТАНИЯ