

Ice dispensing system		
Ice storage capacity	Voltage	Item number
295 kg	220 V/60/1	DB650SA
	230 V/50/1	EDB650SA

IcePro™DB650 Series

automatic ice bagging and dispensing system

Features

- Fast, labor saving ice dispense
- store up to 295 kg of ice
- eliminates the need to shovel or scoop ice from bin
- fill up to 3.5 kg bags a minute
- automatic agitation cycle prevents ice from forming bridges
- push-button actuation automatically dispenses ice at a rate of up to 34 kg per minute

Fresher ice

· first ice in is first ice out

Ice compatibility

 dispenses most cube ice up to 2.54 cm and customer preferred Chewblet® ice into most carts and containers

Durable, user-friendly construction

- bag stand adjusts to fit up to 9 kg ice bags and can be used to fill containers such as Totes™ ice carrier or small ice coolers
- bag stand removes to fit carts or coolers up to 71.1 cm high
- easy-to-use controls with push button or time dispense
- bag opener blows bags open automatically
- · corrosion-resistant poly bin
- dispensing components are easily removed for cleaning
- removable, lockable clear window prevents unauthorized access to ice and provides full access for cleaning
- access from front and side for maintenance
- bag holder pins quickly adjust for use with wire-wicket ice bags with 12.7 cm to 25.4 cm holes on center

Includes:

- 125 x 3.5 kg ice bags and reorder information
- bag stand
- · cleaning brush and bracket

Accessories

3.5 kg ice bags

5 kg ice bags

P-7 C-ring plier for closing bags

Staples, aluminum blunt-end C-rings for Bostitch P-7 plier Foot pedal

Jug and cooler filling kit

Coast Distributors Pty Ltd Ph: (02) 9524 1234 / 1800 688 590 PO Box 288, Unanderra, NSW 2526 sales@coastdistributors.com.au

www.coastdistributors.com.au





Specification Maximum bin capacity 1 295 kg Cubic capacity 0.57 m³ 85.7 cm W1 Width W2 Width, bin top 77.1 cm D1 Depth, without bag stand 118.7 cm 79.4 cm D2 Depth, bin top D3 Depth, with bag stand 122.6 cm **H1** Height 168.9 cm adjustable W3 Drip tray width 42.5 cm **D4** Drip tray depth 25.7 cm L1 Dispense clearance 71.1 cm L2 Bag stand dispense clearance 66.0 cm Installation clearance Service 87.0 cm wide door access clearance 30.5 cm right side C1 Electrical² 2.5 amps, max. fuse 15 amps 220 V/60/1 2.1 m cord with NEMA 6-15 plug C2 Electrical² 10 amp plug 230 V/50/1

L3 Drain ³	1.00" FPT
Dispense rate	up to 34 kg per minute
Ice compatibility	non-flake up to 2.54 cm ²

205 kg

NOTES: For indoor use only

Shipping weight

SHORT FORM SPECIFICATION: Automatic ice storage and dispensing system to be Follett 220 V/60 Hz DB650SA or 230/50 Hz EDB650SA with elevated bin and base. Bin to hold up to 295 kg of ice. Dispense rate to be approximately 34 kg/min. Two position ice discharge chute with selector lever allows filling of bags or other containers. Lockable clear inspection window shall have interlock switch to prevent operation if window is removed. Hopper to be constructed of double wall rotationally molded polyethylene insulated with non-CFC polyurethane foam. Heavy-duty agitation system includes two stainless steel agitators and motors. Dispense auger to be rotationally molded plastic, driven by 1/4 HP motor. Activation of the dispensing function shall be controlled by push-button. Dispenser shall be equipped with holding pins for bags, time dispense, and blower function for automatically opening bags. DB650SA is NSF, UL and cUL listed. EDB650SA is CE listed.


Notes:


- $^{\rm 1}$ Computed on cubic volume of bin. Does not reflect voids that can occur due to pyramiding.
- ² C1, C2 within 2.1 m from right rear corner.
- ³ Follett recommends installation of a floor drain with grate with all ice storage bins.

Local food regulations vary. Please check with your local authorities for requirements for packaged ice.

Bostitch is a registered trademark of Stanley Black and Decker. Ice Pro and Totes are trademarks of Follett LLC. Chewblet and Follett are registered trademarks of Follett LLC, registered in the US. Follett reserves the right to change specifications at any time without obligation. Certifications may vary depending on country of origin.

Dimensional drawing

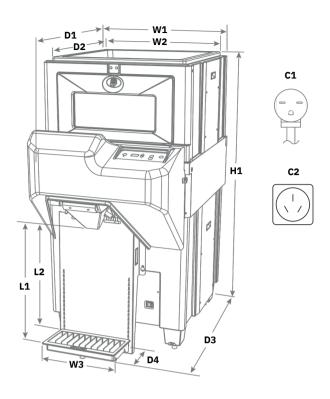



Coast Distributors Pty Ltd Ph: (02) 9524 1234 / 1800 688 590 PO Box 288, Unanderra, NSW 2526 sales@coastdistributors.com.au

www.coastdistributors.com.au



