

FFAR 0.4 - 0.6 Series

Sub Zero Flake Ice Machines

230v 1 Phase 50Hz



FFo.4AR / FFo.6AR
Includes stainless steel covers

The FFAR Series Subzero Flake Ice Machines are designed using advanced technology, with highly economical energy consumption, excellent performance and ease of operation.

The FFAR Series uses advanced computer technology to control the ice making process. The PC board controls and monitors the functionality of the ice machine, allowing for easy diagnosis of any problems that may occur.

Ice is produced at -9 degrees, from a static vertical evaporator, completely sealed, with minimum maintenance required for the lifetime of the machine. The evaporator is made of high quality, low temperature alloy steel, which increases the heat exchange efficiency and reduces the energy consumption of the machine.

The FFAR Series Flake Ice Machines can be fitted on a wide range of storage options depending on the customer's requirements.

The FFAR Series is extremely versatile and is used in a wide variety of applications, including: Seafood, Meat Processing, Poultry, Supermarkets and Mining.

Warranty: 3 years parts and labour, 5 years on evaporator assembly.


ACCESSORIES

| WATER FILTERS | |
|---------------|-------------------|
| SYSTEM | REPLACEMENT |
| CD4oB | CD2o2oB CD25oB |

ICE PRODUCTION


| Model Number | Ice Production Per 24hrs |
|--------------|--------------------------|
| FFo.4AR | 400 kg |
| FFo.6AR | 600 kg |



OUTSIDE DIMENSIONS


| Model | Ice Machine Dimensions W1 | Ice Machine Dimensions D1 | Ice Machine Dimensions H1 |
|---------|---------------------------|---------------------------|---------------------------|
| FFo.4AR | 1090 mm | 700 mm | 720 mm |
| FFo.6AR | 1250 mm | 750 mm | 820 mm |

Includes stainless steel covers

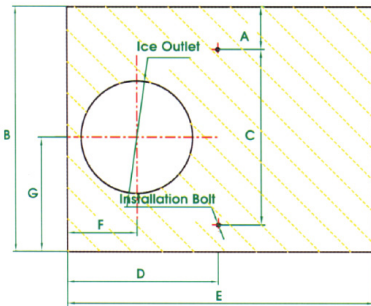ICE OUTLET DIMENSIONS


| Model | A | B | C | D | E | F | G | Ice Outlet Internal Dia. |
|---------|-------|--------|------------|----------|---------|----------|--------|--------------------------|
| FFo.4AR | 87 mm | 700 mm | 395 ± 1 mm | 432.5 mm | 1090 mm | 216.5 mm | 447 mm | Ø 326 |
| FFo.6AR | 95 mm | 750 mm | 450 ± 1 mm | 585 mm | 1250 mm | 419 mm | 430 mm | Ø 326 |

TECHNICAL PARAMETER

| Model | Condenser | Power | Current Draw | Water Consumption | Inlet Water Connection | Drainpipe External Diameter | Net Weight (kg) |
|---------|------------|--------|--------------|-------------------|------------------------|-----------------------------|-----------------|
| FFo.4AR | Air Cooled | 2.1 kW | 4.5 A | 17L/hr | 3/4" GAS | Ø 21 mm | 180 |
| FFo.6AR | Air Cooled | 3 kW | 6.4 A | 25L/hr | 3/4" GAS | Ø 21 mm | 250 |

Notes:

- Refrigerant Type: R404A
- Standard Conditions: Ambient Air Temperature 25°C, Water Temperature 16°C
- Electrical Voltage: 380V/50Hz / 3N
- Supply Water Pressure: 1.5 BAR - 5 BAR

